




Technical Data Sheet T-70 System for Diesel Engines

ECT's Engine Cleaning Systems for diesels combines **T-70** a water based, non-flammable, cleaning formulation, with an engineered injection system designed expressly for maintaining diesel engines and turbochargers at their peak efficiency.

air intake manifold, is easily installed by one person in less than an hour. The cleaning formulation is supplied pre-mixed and ready-to-use and is injected without cutting back power or shutting down the engine.

T-70 Cleaner is an aqueous, amine based formulation sprayed into the engine as a fine mist (approximately 500 micron SMD). The droplets migrate with the airflow and are deposited as a surface active layer on contaminated components. The wet liquid combines chemically with the surface

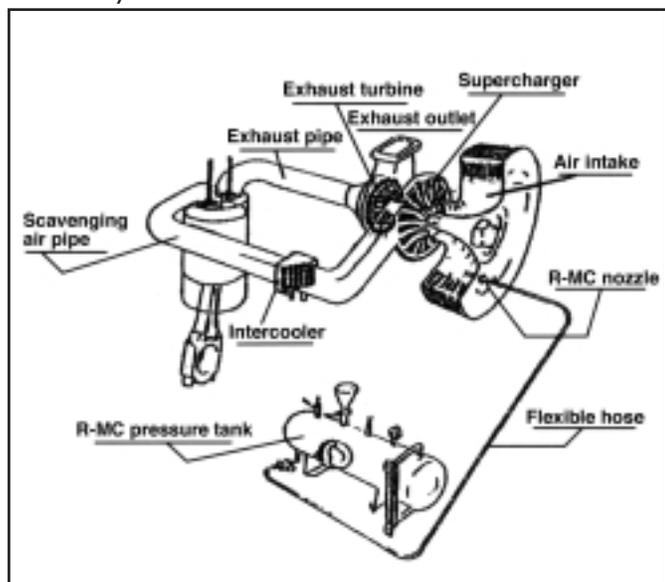

In addition to reducing engine wear, improving fuel consumption, and permitting injection while running, the System offers ease of use and installation, reduced chance of scavenge fires and longer life for engine components.

The **ECT** System comprises either a one gallon pressure tank or a container and small electric pump, hosing and a single injection nozzle. The nozzle, located on the

contaminants which undergo a molecular change. The chemical action is accelerated by the thermal environment and the contaminants are gradually reduced to a fine white fly ash that is ejected with exhaust gases. The unique, amine-based formulation can remain in a wet state at temperatures approaching 350°F.



For that reason, **T-70** has a residence time vastly exceeding solvent-based products.

THE RESULTS:

- Scavenge spaces are cleaned, reducing risk of fire.
- Carbon deposits which constrain air flow are moved from exhaust ports.
- Soot is removed from uptake ducting, reducing risk of funnel sparking and choking of boiler tubes.
- Removal of soot reduces NOx and other emissions.
- Power output is increased.
- Fuel consumption is reduced.
- Greater reliability and reduced downtime costs.


The **T-70** System has been used for more than 35 years on virtually every model of diesel engine, marine and ground, including:

GMC	MAN
CATERPILLAR	LEYLAND
WICHMANN	DEUTZ
DOXFORD	B&W
SULZER	ALPHA
SACM	MIRRLEES
WARTSILA	FAIRBANKS-
RUSTON	MORSE
GE	

Bridgeport Business Park • 401 East Fourth Street • Bridgeport, PA 19405

Tel: 610-239-5120 • Fax: 610-239-7863 • email: info@ectinc.net • www.ectinc.net

EFFECT OF CLEANING ON DIESEL EMISSIONS

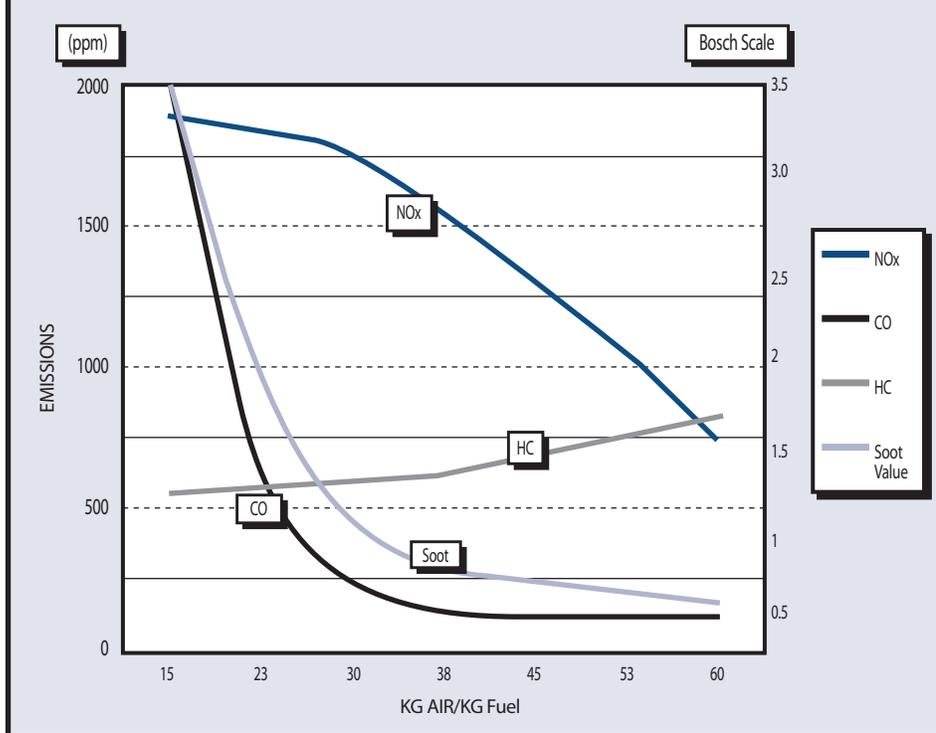

TURBOCHARGED DIESEL ENGINES

Engine efficiency degrades as atmospheric deposits accumulate on the turbocharger compressor, reducing the air supply and causing incomplete combustion. The resulting soot particles are deposited on the aerodynamic surfaces of the impeller, further reducing compressor efficiency. The result is increased compressor load and decreased rotational speed, which means less air delivered to the engine and accelerated production of burnt fuel deposits.


T-70, properly used, can break this efficiency-robbing cycle by removing accumulated deposits from turbocharger, intercooler, combustion chamber and exhaust.

ASPIRATED DIESEL ENGINES

Output in a naturally aspirated diesel engine depends on free air flow. Accumulated deposits in the exhaust ports can result in inefficient discharge of gases from the combustion chamber, causing fuel air contamination, retarding combustion and creating accelerated deposition of foulants.

Treatment with **T-70** breaks down the bond between contaminants and component surfaces, gradually reducing the deposits to a fine white powder which is discharged with the exhaust gases.

With initial cleaning injections of just 1 quart of **T-70** over four days, followed by regular cleanings on alternate weeks with <1 quart of fluid, the engine can be maintained deposit free with lowered emissions.

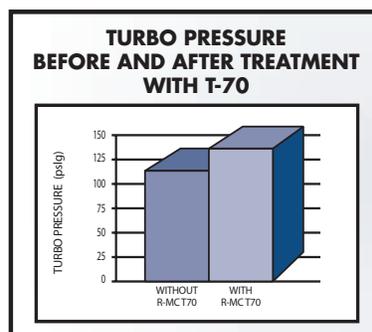

PRODUCT DESCRIPTION:

T-70 is a proprietary blend of surfactants, corrosion inhibitors and deionized/demineralized water which is supplied in a pre-mixed, ready-to-use form. A tertiary amine-based surfactant, the Material Safety Data Sheet provides details respecting content, properties and precautions, but the following is a descriptive summary thereof:

Appearance:

Clear, homogenous liquid

Odor:

Mild, acceptable

pH: 6.5-7.5

Evaporative Temperature:

220°F.

Flash Point:

Non-flammable

Toxicity: Non-Toxic

Decomposition:

99% biodegradable,

24 hours

Specific Conductance:

ms/m @ 36°F. 0.1-0.9

Color: Clear, amber

Specific Gravity: 1.002 (H₂O)

Heavy Metals: Trace amounts

Earth Alkali Metals:

Potassium: <0.25 ppm

Sodium: <0.25 ppm

Calcium: <0.1 ppm

Magnesium: <0.1 ppm

Nitrate ions: None

Sulfate ions: None

Chloride ions: None